



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 24 SEP 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02078759.4

BEST AVAILABLE COPY

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02078759.4
Demande no:

Anmeldetag:
Date of filing: 12.09.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

An illumination system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

F21V/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

An illumination system

12. 09. 2002

(65)

The invention relates to an illumination system comprising:

1. a light source;
2. a light-directing assembly in close proximity to the light source and comprising a plurality of microprisms, each microprism comprising an input surface that admits light radiating from the light source, an output surface distal from and parallel to the input surface, and at least one sidewall disposed between and contiguous with the input and output surfaces and forming an obtuse tilt angle with respect to the input surface and further positioned for effecting total reflection of the light rays received by the input surface, the sidewalls of the microprisms defining interstitial regions between the microprisms;
3. at least one blocking means positioned to block the passage of light through the sidewalls; and
4. an optical means located between the light source and the light-directing assembly.

Such an illumination system is known from United States patent document no. 5,839,823 (Hou et al.). In this known system the light source is formed by an incandescent lamp, a light emitting diode (LED), a metal or halogen high intensity discharge (HID) lamp or a fluorescent lamp etcetera. The microprisms used can have any suitable form, for example conical, polyhedral, polyhedral curvilinear or curvilinear. The present invention is not restricted to a specific light source or a specific geometrical shape of the microprisms. The blocking means in this known system serves to block and redirect light rays leaving the light source and reaching the interstitial regions adjacent to the sidewalls of neighbouring microprisms in order to avoid such light rays entering the microprisms through the sidewalls thereof. Distortion of the overall angular light intensity distribution output of the known illumination system is thereby prevented. The blocking means is formed by a highly-reflective solid material filling the interstitial regions and/or covering said sidewalls, thereby reflecting or merely blocking the passage of light rays through the sidewalls. The known optical means (for example, fabricated from a rectangular piece of glass or plastic) located between the light source and the light-directing assembly, serves to reduce the transmission

of light from the light source to the light-directing assembly, so that the general output of the light-directing assembly becomes more uniform and glare is minimized.

A disadvantage of the illumination system known from the above United States patent publication is that the so-called "collimation cut-off angle", i.e. the effective
5 angular width of the angular light intensity distribution cannot be sharply defined in the sense
~~that a sharp transition is lacking between the inner angular region within which light is~~
emitted from the illumination system and the outer angular region within which substantially
no light is emitted. One reason is that said blocking means exhibits optical coupling with
light incident thereon, resulting in an at least partly diffuse reflection from the blocking
10 means which broadens the width of the angular light intensity distribution of the light
incident on the input surfaces of the micropisms, leading to a broadening of the angular light
intensity distribution of the light emitted from the output surfaces. Another reason is that it is
generally very difficult from a practical point of view to provide the interstitial regions with
blocking means in a way as to fully prevent the passage of light through the sidewalls while
15 maintaining an efficient light recycling in the illumination system that ensures a maximized
lumen output from the illumination system through a minimization of optical absorption
losses inside the illumination system.

The object of the invention is to overcome that drawback of the prior art, and
in order to accomplish that objective, an illumination system referred to in the introduction is
20 characterized in that said optical means comprise a reflective powder to at least substantially
shield the blocking means from direct exposure to light radiated from the light source. This
reflective powder is particularly a diffuse reflective dry powder. Thus the powder provides
diffuse reflection (i.e. diffuse back-reflection) of light away from the blocking means without
absorption losses, so that this light can be subsequently recycled inside the illumination
25 system.

In one preferred embodiment of an illumination system according to the
invention said powder, which is in particular of the "free-flowing type", comprises calcium
halophosphate, calcium pyrophosphate, BaSO_4 , MgO , YBO_3 , TiO_2 or Al_2O_3 particles. Such a
powder is resistant against high temperatures, whilst important chemical properties thereof do
30 not deteriorate as a result of being exposed to high temperatures, light and/or moisture.

In another preferred embodiment of an illumination system according to the
invention the particles have an average diameter ranging between 0.1 and 100 μm , in
particular 5 to 20 μm . In order to obtain a "free-flowing" type powder, said particles are
preferably mixed with fine-grained Al_2O_3 particles having an average diameter which ranges

between 10 and 50 nm. The amount of the latter particles, also known as Alon-C (Degussa, Frankfurt), preferably ranges between 0.1 and 5 wt.%, in particular 0.5 to 3 wt.%.

In another preferred embodiment of an illumination system according to the invention said powder is mixed with colour pigments. This provides the decorative effect whereby it appears as if (partially) coloured light is being emitted by the light source.

In another preferred embodiment of an illumination system according to the invention the powder is incapable of absorbing light, in particular light having a wavelength in the visible wavelength range. Any loss of light in this wavelength range due to absorption is thus prevented.

In another preferred embodiment of an illumination system according to the invention said blocking means is provided on a surface directly adjacent to the sidewalls of neighbouring microprisms. Preferably, this blocking means is provided on selected areas of a side of a support plate extending at least substantially in parallel with the light-directing assembly and positioned inbetween the light source and the light-directing assembly. The support plate is preferably in optical contact with the input surfaces of the microprisms, whereas said selected areas (provided with the blocking means) are formed by those areas of said side of said support plate that are not in optical contact with said input surfaces, said selected areas facing the interstitial regions. In such a case the blocking means are particularly a non-transmissive layer, preferably a metal layer or a black-absorbing layer.

In another preferred embodiment of an illumination system according to the invention said blocking means is provided on the sidewalls of the microprisms, that is the surface of these sidewalls facing the interstitial regions. Said blocking means is then preferably a metal layer, more in particular selected from the group formed by Al and Ag. Said powder is then contained inside the interstitial regions between the microprisms. In other words, the powder is contained inside an interstitial space bounded by the sidewalls of adjacent microprisms and a side of a support plate extending at least substantially in parallel with the light-directing assembly. This support plate is preferably in optical contact with the input surfaces of the microprisms, wherein the powder fills the entire interstitial regions.

In another preferred embodiment of an illumination system according to the invention said powder is contained in a series of reflector elements supported by a base plate at least substantially extending in parallel with the light - directing assembly, wherein each element is positioned centrally underneath a corresponding interstitial region between adjacent microprisms. In a preferred embodiment the area of each reflector element facing the light source corresponds to the projected cross-section area of a corresponding interstitial

region facing the light source, the projection carried out on an imaginary plane extending in parallel with the light-directing assembly at the location of and containing the input surfaces.

In another preferred embodiment of an illumination system according to the invention, the width of the interstitial regions is at least 1 mm, wherein the height thereof is at least 1mm. Said width is defined as the lateral distance between adjacent input surfaces.

~~The invention will now be explained more in detail with reference to two~~
figures illustrated in a drawing, which figures are a schematic side elevation of a preferred embodiment of an illumination system in accordance with the invention.

In figure 1 is shown an illumination system provided with a light source (not shown) for directing isotropic light towards a light-directing assembly 1. Said light-directing assembly 1 consists of a base holding plate 2 carrying a channel plate 3, the latter being made of a transparent resin and being equipped with cavities filled with a "free-flowing" type powder acting as reflector elements 4. This powder comprises calcium halophosphate particles mixed with fine-grained Al_2O_3 particles, also known as Alon-C (Degussa, Frankfurt). As can be seen from figure 1, the channel plate 3 extends in parallel with a wedge plate 5. The wedge plate 5 comprises a plurality of micropisms 6 made of a photo-polymerisable resin, each micropism 6 comprising an input surface 7 that admits light radiating from the light source (not shown), an output surface 8 distal from and parallel to the input surface 7, and at least one sidewall 9 disposed between and contiguous with the input and output surfaces 7,8 and forming an obtuse tilt angle with respect to the input surface 7 and further positioned for effecting total reflection of the light rays received by the input surface 7. The sidewalls 9 of the micropisms 6 bound interstitial regions 10 filled with air between the micropisms 6. The channel plate 3 comprises selected areas provided with absorbing black layers 11 facing the interstitial regions 10 as shown. The layers 11 serve as blocking means in order to block and absorb light rays leaving the light source (not shown), thereby preventing them to reach the interstitial regions 10 adjacent to the sidewalls 9 of the micropisms 6, in order to avoid such light rays entering the micropisms 6 through the sidewalls 9 thereof. A widening of the angular light intensity distribution within which light is emitted from the output surfaces is thus prevented. A lens foil 12 is mounted to further collimate the light output.

The reflector elements 4 filled with said powder serve to substantially shield the absorbing layers 11 from direct exposure to light radiated from the light source (not shown), and reflect light away from them so that a high lumen output from the illumination system can be maintained through minimised optical absorption losses. As such, the

absorbing black layers constitute a last rigorous line of defence against light rays entering the microprisms through the sidewalls thereof, while the powder present inside the reflector elements serves to maximise the lumen output from the illumination system.

Figure 2 relates to another preferred embodiment of an illumination system according to the invention, wherein parts that correspond to those in figure 1 are designated with the same reference numerals. A channel plate 3 with reflector elements 4 is now absent, as the reflective (diffuse) powder 13 is now present in the interstitial regions 10 and a Al or Ag layer 11 is put onto the sidewalls 9. The height and width of the interstitial regions 10 are designated by h and w, respectively, and amount to 1 mm or more in order to facilitate filling with the powder 13.

CLAIMS:

EPO - DG 1

12. 09. 2002

(65)

1. An illumination system comprising:
 - a. a light source;
 - b. a light-directing assembly in close proximity to the light source and comprising a plurality of microprisms, each microprism comprising an input surface that admits light radiating from
5 the light source, an output surface distal from and parallel to the input surface, and at least one sidewall disposed between and contiguous with the input and output surfaces and forming an obtuse tilt angle with respect to the input surface and further positioned for effecting total reflection of the light rays received by the input surface, the sidewalls of the microprisms defining interstitial regions between the microprisms;
 - 10 c. at least one blocking means positioned to block the passage of light through the sidewalls; and
 - d. an optical means located between the light source and the light-directing assembly, characterized in that
 - e. said optical means comprise a reflective powder to at least substantially shield
15 the blocking means from direct exposure to light radiated from the light source.
2. An illumination system according to claim 1, wherein the reflective powder is a diffuse reflective powder.
- 20 3. An illumination system according to claim 2, wherein said powder comprises calcium halophosphate, calcium pyrophosphate, BaSO₄, MgO, YBO₃, TiO₂ or Al₂O₃ particles.
4. An illumination system according to claim 3, wherein the particles have an
25 average diameter ranging between 0.1 and 100 µm, in particular 5 to 20 µm.
5. An illumination system according to claim 3 or 4, wherein said particles are mixed with fine-grained Al₂O₃ particles having an average diameter which ranges between 10 and 50 nm.

6. An illumination system according to claim 5, wherein the amount of fine-grained Al_2O_3 particles having an average diameter ranging between 10 and 50 nm ranges between 0.1 and 5 wt.%, in particular 0.5 to 3 wt.%.

5

~~7. An illumination system according to any one of the preceding claims 1 - 6,~~
wherein said powder is mixed with colour pigments.

8. An illumination system according to any one of the preceding claims 1 - 7, wherein said powder is a "free-flowing" type powder.

10

9. An illumination system according to any one of the preceding claims 1 - 8, wherein the powder at least is incapable of absorbing light, in particular light having a wavelength in the visible wavelength range.

15

10. An illumination system according to any of the preceding claims 1-9, wherein said blocking means is provided on a surface directly adjacent to the sidewalls of neighbouring microprisms.

20 11. An illumination system according to claim 10, wherein said blocking means comprises a black-absorbing layer or a metal layer, preferably selected from the group formed by Al and Ag.

25 12. An illumination system according to any of the preceding claims 1-9, wherein said blocking means is provided on the sidewalls of the microprisms.

13. An illumination system according to claim 12, wherein said blocking means comprises a metal layer, preferably selected from the group formed by Al and Ag.

30 14. An illumination system according to claim 12 or 13, wherein said powder is contained in the interstitial regions between the microprisms.

15. An illumination system according to any of the preceding claims 1 - 13, wherein said powder is contained in a series of reflector elements supported by a base plate at

least substantially extending in parallel with the light - directing assembly and wherein each element is positioned centrally underneath a corresponding interstitial region between adjacent microprisms.

- 5 16. An illumination system according to claim 15, wherein the area of each reflector element facing the light source corresponds to the projected cross-section area of a corresponding interstitial region facing the light source, the projection carried out on an imaginary plane extending in parallel with the light-directing assembly at the location of and containing the input surfaces.

10

17. An illumination system according to any of the preceding claims 1-16, wherein the width of the interstitial regions is at least 1 mm and wherein the height thereof is at least 1mm.

ABSTRACT:

12. 09. 2002


(65)

An illumination system comprising:

- A. a light source;
- B. a light-directing assembly in close proximity to the light source and comprising a plurality of microprisms, each microprism comprising an input surface that admits light
5 radiating from the light source, an output surface distal from and parallel to the input surface, and at least one sidewall disposed between and contiguous with the input and output surfaces and forming an obtuse tilt angle with respect to the input surface and further positioned for effecting total reflection of the light rays received by the input surface, the sidewalls of the microprisms defining interstitial regions between the
10 microprisms;
- C. at least one blocking means positioned to block the passage of light through the sidewalls; and
- D. an optical means located between the light source and the light-directing assembly, with the special feature that
- 15 E. said optical means comprise a reflective powder to at least substantially shield the blocking means from direct exposure to light radiated from the light source.

Fig. 1

1/2

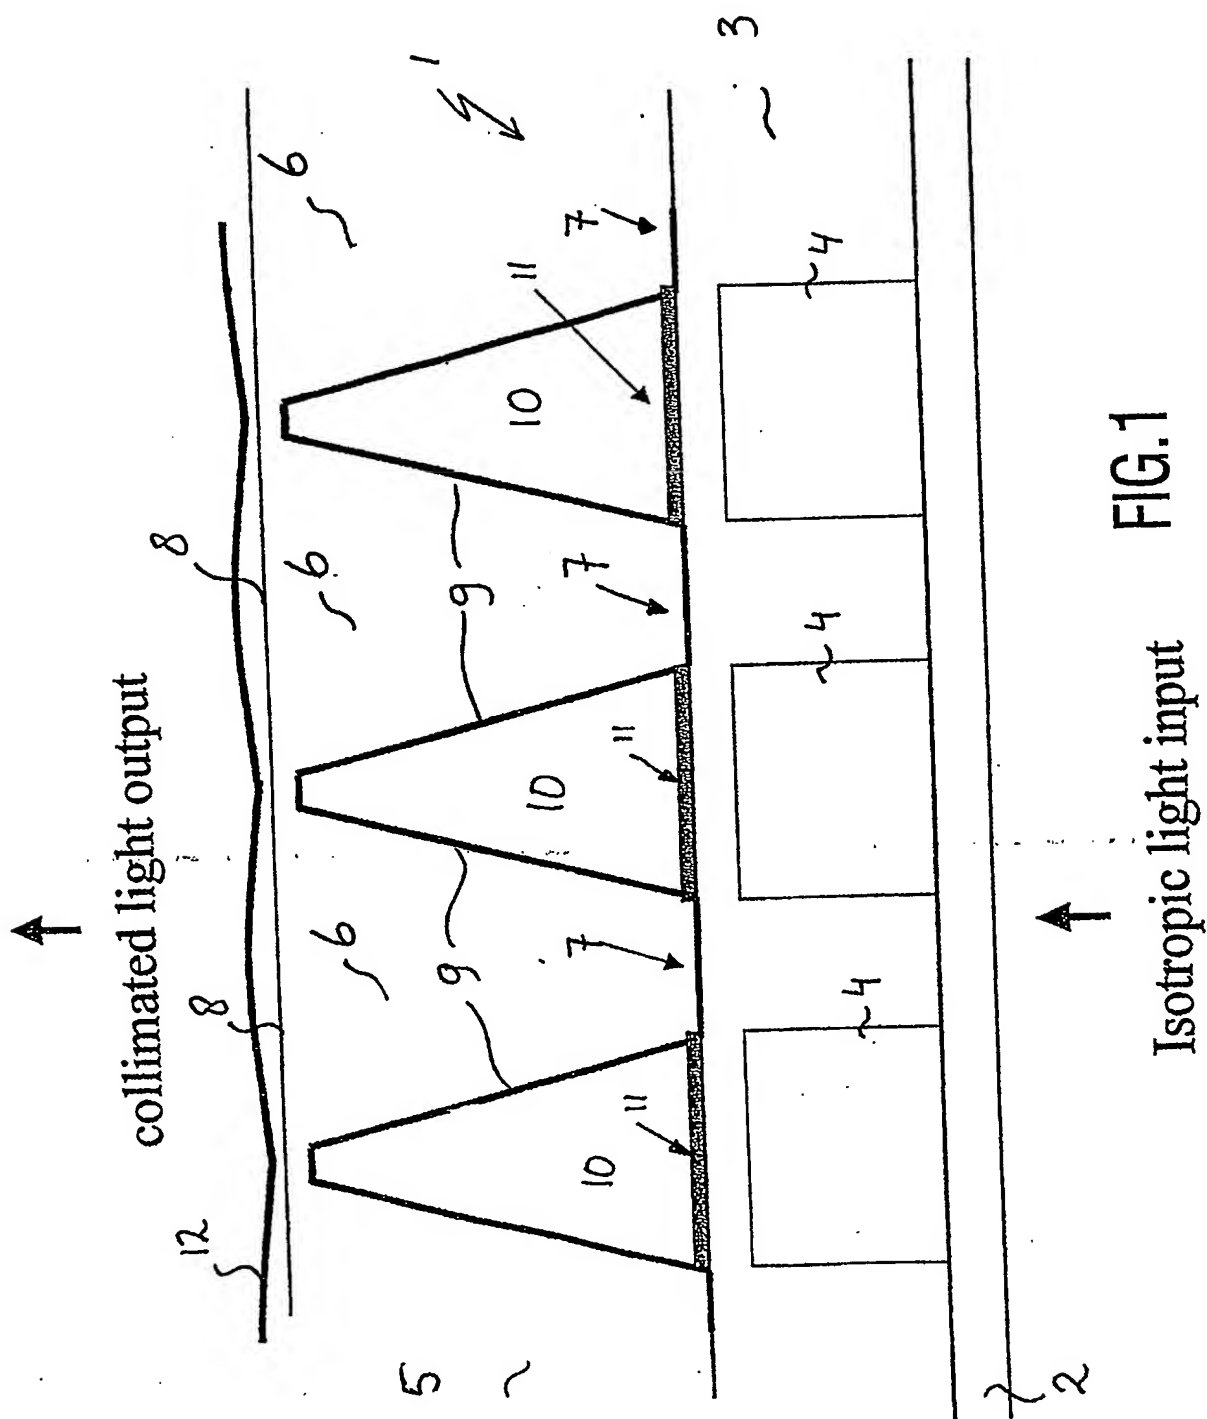

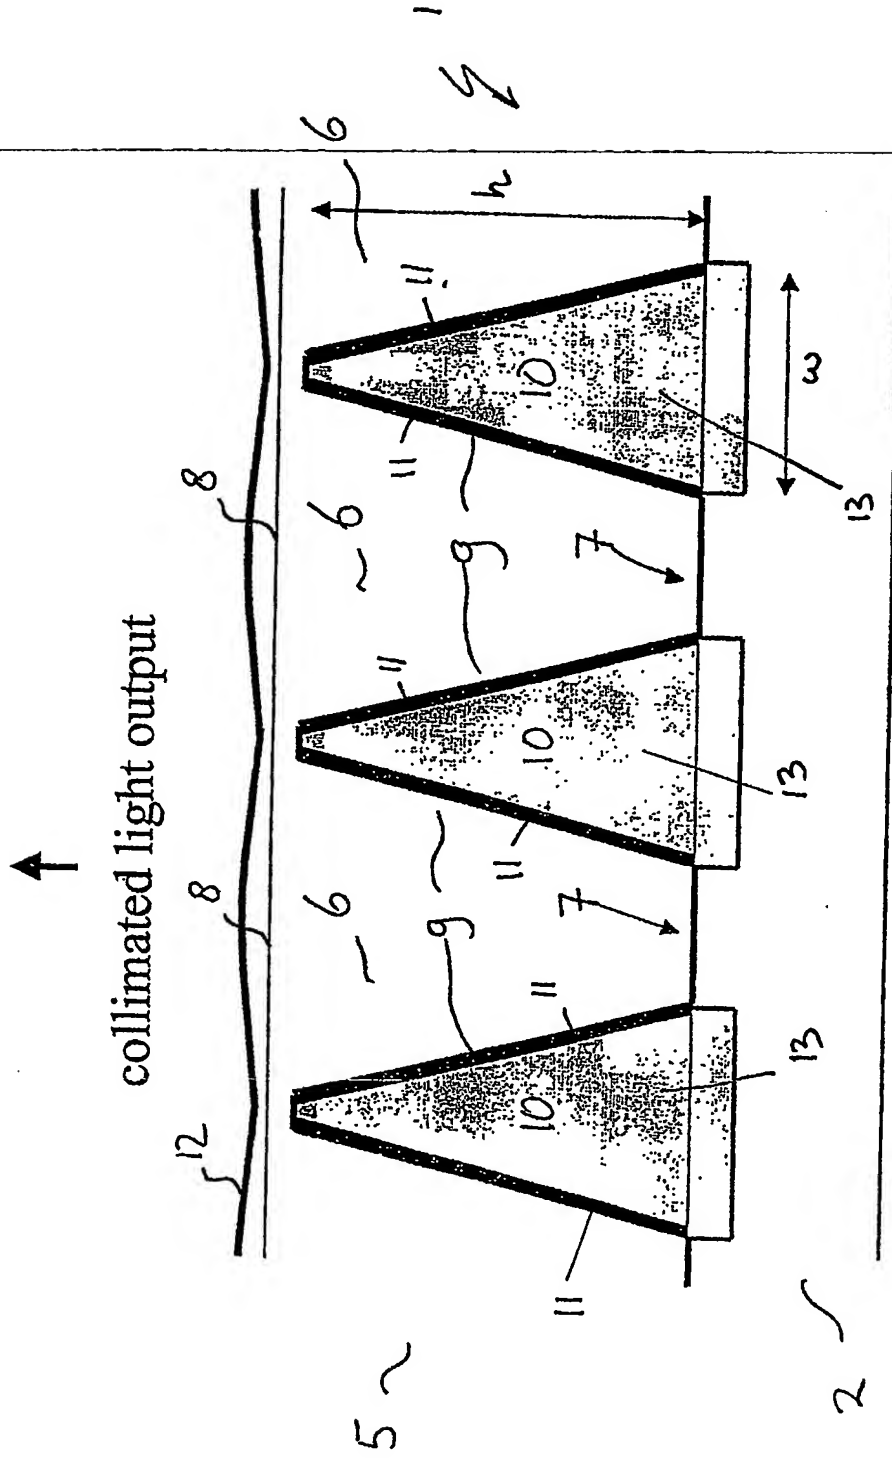


FIG.2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.